

JXEFULTM

Germany technology

LED Series



JXEFUL LIGHTING ELECTRICAL CO.,LTD.

LED Linear Lights

JXEFL™ Germany technology

Material Features:

1. Lamp uses made of aluminium
2. High strength glass
3. Bear high temperature silicon rubber seals
4. Anodised surface
5. Within driver of constant current

Apply:

Building Wall. Bridges, plazas, parks, Advertisement

Parameter:

Power: 24 W

Voltage: 2V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color


Light beam angle: 15° - 25°

Grade: IP65



Power	Inner box	Master carton	Quantity	N.W/G.W/kg
24W	8x8x121	122.5x17.5x18.5	4	13.5/15



L11002



L11003



Material Features:

1. Lamp uses made of aluminium
2. High strength glass
3. Bear high temperature silicon rubber seals
4. Anodised surface
5. Within driver of constant current

Apply:

Building Wall. Bridges, plazas, parks, Advertisement

Parameter:


Power: 2W / 30PCS, 4W / 60PCS

Voltage: 12V, 24V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W/G.W/kg
2W	2.2x1.4x53.5	55.5x13x9	25	3 / 4
4W	2.2x1.4x103.5	105.5x13x9	25	6 / 7.5

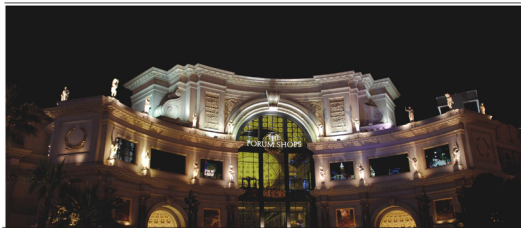


LS5065-3W

LS5076-3W
Parameter:
Voltage: 110V~240V

Colour: 2600K~6500K

Model No	Power	Size (mm)
LS5065-3W	3W	φ50X65
LS5076-3W	3W	φ50X76


LS5098-3W

LS60116Y-5W

LS60116-5W
Parameter:
Voltage: 110V~240V

Colour: 2600K~6500K

Model No	Power	Size (mm)
LS5098-3W	3W	φ50X98
LS60116Y-5W	5W	φ60X116
LS60116-5W	5W	φ60X116


LS12060-5W

LS15070-6W


Parameter:
Voltage: 12V~240V

Colour: 2600K~6500K

Model No	Power	Size (mm)
LS12060-5W	5W	φ120X60
LS15070-6W	6W	φ150X70



L69020



Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:

Power: 3W

Voltage: AC 220V


Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/kg
3W	12.5x12.5x14.3	52.5x39.5x17.5	12	7.8/10.3



L69021



Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:

Power: 3W

Voltage: AC 220V


Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/kg
3W	11.5x11.5x12.5	48x36.5x15.5	12	5.9/7.5



L69022



Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:

Power: 3W

Voltage: AC 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/kg
3W	10.5x10.5x12.5	44x33.5x15.5	12	5.2/7

L69018

Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:


Power: 3W

Voltage: AC 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: Ip67

Power	Inner box	Master carton	Quantity	N.W/G.W/Net
3W	11.5x11.5x3.5	36.5x24.5x22	12	5.5/6.5



L69023

Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:


Power: 4W

Voltage: AC 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/Net
4W	17.5x17.5x8	54.5x37x19	12	12/14



L69024

Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:


Power: 9W

Voltage: AC 220V

Colour: White, Yellow, Red, Blue, Green, Change Color


Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/Net
9W	20.5x20.5x6	42.5x42.5x21	12	15/17





L69034



Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:

Power: 1W



Voltage: AC 220V

Colour: White, Yellow, Red, Blue, Green,

Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/m
1W	7X7X9	37X23X26	30	7/9

L69035



Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:

Power: 5W


Voltage: AC 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/m
5W	16.5x16.5x6	34.5x34.5x15	8	11/12.5

L69036



Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:

Power: 9W

Voltage: AC 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/m
9W	20.5x20.5x6	42.5x42.5x15	8	15.6/17

L69025


Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:

Power: 3W/4W

Voltage: AC 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/k
3W/4W	11.2x11.2x6	24x24x21	12	6.4/7.5

L69033


Material Features:

1. Steel cover
2. Aluminum body
3. high-strength tempered glass

Apply:

Garden, plaza, street, park, lands cape, entertainment, pool, fountain, swimming pool, etc.

Parameter:

Power: 3W/4W

Voltage: AC 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP67

Power	Inner box	Master carton	Quantity	N.W/G.W/k
3W/4W	13X10X13	52X27X27	12	18.4/20



LED Flood Lights

JXEFL™ Germany technology

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 18 W



Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Light beam angle: 30° , 45° , 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W.G.W.kg
18W	20x13.5x19	62x28.5x22	6	11.9/14



L62018

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 36 W



Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Light beam angle: 30° , 45° , 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W.G.W.kg
36W	33.5x12x21.6	75x35x24.5	6	16/19



L62019

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 12 W



Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Light beam angle: 30° , 45° , 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W.G.W.kg
12W	24.6x13x23.2	81x26x23.2	6	14.3/17.5




L62020

LED Flood Lights

JXEFUL™ Germany technology



L62021



Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 3 W

Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color


Light beam angle: 30° - 45° - 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W/G.W(kg)
3W	7.6x7.5x10	50x33.5x23	24	7.2/19.5



L62022



Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 3 W

Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color


Light beam angle: 30° - 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W/G.W(kg)
3W	6.5x6.5x14	42x28.5x17	24	5/7.3



L62023



Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 3 W

Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Light beam angle: 30° - 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W/G.W(kg)
3W	6.5x6.5x16.5	42x28.5x19.5	24	5.4/7.7

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:


Building Wall, Bridges, Advertisement

Parameter:

Power: 3 W
Voltage: 12V, 24V, 110V, 220V
Colour: White, Yellow, Red, Blue, Green, Change Color
Light beam angle: 30° - 60°
Grade: IP65

Power	Inner box	Master carton	Quantity	N.W.G.W
3W	9x9x8.8	38.5x29x20.5	24	9.3/12.5

L62024



L62027

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver


Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 3W
Voltage: 12V, 24V, 110V, 220V
Colour: White, Yellow, Red, Blue, Green, Change Color
Light beam angle: 30° - 45° - 60°
Grade: IP65

Power	Inner box	Master carton	Quantity	N.W.G.W
3W	10X10X12.5	52X32X27	30	13.5/15



L62026

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver


Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 6 W
Voltage: 12V, 24V, 110V, 220V
Colour: White, Yellow, Red, Blue, Green, Change Color
Light beam angle: 30° - 60°
Grade: IP65

Power	Inner box	Master carton	Quantity	N.W.G.W
6W	13.5X13.5X12.5	58X28X27	16	



LED Flood Lights

JXEFUL™ Germany technology

L62031A-150

L62031-150



Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 6 W

Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color


Light beam angle: 30° - 45° - 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W/G.W
L62031A-6W	15.5X15.5X19	48.5X33X40	12	16.1/17.8
L62031-6W	15.5X15.5X19	48.5X33X41	12	17.4/18.9

L62031A-180

L62031-180



Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 12W

Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color


Light beam angle: 30° - 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W/G.W
L62031A-12W	16.5X18.5X18.5	47.5X39X39	12	19.7/21.2
L62031-12W	16.5X18.5X19.5	76X39X22	8	15.3/16.7

L62031A-210

L62031-210



Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 18W

Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color

Light beam angle: 30° - 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W/G.W
L62031A-18W	21.5X21.5X22	66.5X45X24	8	12/13.5
L62031-18W	21.5X21.5X22	66.5X45X24	8	13.8/15.5

LED Flood Lights

JXEFL™ Germany technology

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 6 W/12W


Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color


Light beam angle: 30° - 45° - 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W.G.W.W
L62025-6W	16x12.5x12.5	50x26.5x27.5	12	12.6/15
L62025-12W	18.5x18.5x18.5	47.5x30x39	12	19.7/21.2



L62025-180



L62025-120

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 6W/9W


Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green, Change Color


Light beam angle: 30° - 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W.G.W.W
6W	15.5x15.5x19	48.5x33x34	12	
9W	18.5x18.5x17.5	57.5x36x37	12	



L62029-180



L62029-150

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 3W/4W

Voltage: 12V, 24V, 110V, 220V


Colour: White, Yellow, Red, Blue, Green, Change Color

Light beam angle: 30° - 60°

Grade: IP65

Power	Inner box	Master carton	Quantity	N.W.G.W.W
3W/4W	9x9x12	47x29x28	30	15/16

L62033



LED Flood Lights

JXEFUL™ Germany technology



L62028-50W








L62028-30W



L62028-20W



L62028-10W



L62028J-50W



L62028J-30W



L62028J-20W



L62028J-10W

Material Features:

1. Aluminum body
2. high-strength tempered glass
3. Within constant current driver

Apply:

Building Wall, Bridges, Advertisement

Parameter:

Power: 10W/20W/30W/50W

Voltage: 12V, 24V, 110V, 220V

Colour: White, Yellow, Red, Blue, Green,

Light beam angle: 30° - 60°

Grade: IP65

Model No	Power	Inner box	Master carton	Quantity	N.W/G.W(kg)
L62028-50W	50W	30X25X16	77X32X34	6	
L62028-30W	30W	23.5X19.5X13.5	49X41X29	8	
L62028-20W	20W	19X15X11	47X40X24	12	
L62028-10W	10W	13X10X9.5	52X28X21	20	

Model No	Power	Inner box	Master carton	Quantity	N.W/G.W(kg)
L62028J-50W	50W	30X25X16	77X32X34	6	
L62028J-30W	30W	23.5X19.5X13.5	49X41X29	8	
L62028J-20W	20W	19X15X11	47X40X24	12	
L62028J-10W	10W	13X10X9.5	52X28X21	20	

Material Features:

1. Whole stainless steel
2. Rubber gasket
3. High-strength tempered glass

Apply:

Pool, fountain, swimming pool,

Parameter:

Power: 2W


Voltage: 12V

Light beam angle: 20° ~ 25° ~ 30°

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP68

Power	Inner box	Master carton	Quantity	N.W./G.W/kg
2W	13x9.5x16	30.5x27.5x34	12	11/13.5

L64005

Material Features:

1. Whole stainless steel
2. Rubber gasket
3. High-strength tempered glass

Apply:

Pool, fountain, swimming pool,

Parameter:

Power: 2W


Voltage: 12V

Light beam angle: 20° ~ 25° ~ 30°

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP68

Power	Inner box	Master carton	Quantity	N.W./G.W/kg
2W	13x9.5x19	30.5x27.5x40	12	12/14.4

L64004

Material Features:

1. Whole stainless steel
2. Rubber gasket
3. High-strength tempered glass

Apply:

Pool, fountain, swimming pool,

Parameter:

Power: 9W


Voltage: 12V

Light beam angle: 20° ~ 25° ~ 30°

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP68

Power	Inner box	Master carton	Quantity	N.W./G.W/kg
9W	16.5x12x22	50x34.5x25	8	8/11.5


L64009


LED Lawn Lights

JXEFL™ Germany technology



L65001
(OPAL)



Material Features:

1. Whole stainless steel
2. Rubber gasket
3. High-strength tempered glass

Apply:

Path, Steps and ladders, building wall, Garden

Parameter:

Power: 3W ϕ 5LED

Voltage: AC220-240V


Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP43

Power	Inner box	Master carton	Quantity	N.W/G.W
3W	16x16x62.5	64.5x50x64.5	6	11.4/14



L65006
(TRANSPARENT)



Material Features:

1. Whole stainless steel
2. Rubber gasket
3. High-strength tempered glass

Apply:

Path, Steps and ladders, building wall, Garden

Parameter:

Power: 3W ϕ 5LED

Voltage: AC220-240V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP43

Power	Inner box	Master carton	Quantity	N.W/G.W
3W	16x16x62.5	64.5x50x64.5	6	11.4/14




L83002-1
L83002-2
Material Features:

1. The aluminium alloy light of die casting has body, the surface adopts the anti ultraviolet static to gush out the powder,
2. Glass surface frost glass

Apply:

Botanical garden, street, square, park, fencing

Parameter:

 Power: 2x3W ϕ 5LED

Voltage: AC220-240V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP43

Power	Inner box	Master carton	Quantity	N.W/G.W
2X3W	20.3x15x29.8	78x42.5x31.5	10	7.2/11


L83002-3
L83002-4
Material Features:

1. The aluminium alloy light of die casting has body, the surface adopts the anti ultraviolet static to gush out the powder,
2. Glass surface frost glass

Apply:

Botanical garden, street, square, park, fencing

Parameter:

 Power: 2x3W ϕ 5LED

Voltage: AC220-240V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP43

Power	Inner box	Master carton	Quantity	N.W/G.W
2X3W	24.6x15x36.8	78x51x39.5	10	7/10.5


L83060
Material Features:

1. The aluminium alloy light of die casting has body, the surface adopts the anti ultraviolet static to gush out the powder,
2. Glass surface transparent

Apply:

Botanical garden, street, square, park, fencing

Parameter:

 Power: 3W ϕ 5LED

Voltage: AC220-240V

Colour: White, Yellow, Red, Blue, Green, Change Color

Grade: IP43

Power	Inner box	Master carton	Quantity	N.W/G.W
3W	150x10x11.4	53x31.5x14.5	10	5.5/7.8

ABOUT US:

Our company is professional in manufacturing outdoor lightings such as stainless steel lights, wall lights, projection lights, lawn lights, garden lights, underground lights, under-water lights, street lights etc.

Our company, established in June 2006, is an up-and-coming youngster in illumination industry, but our engineers have more than 10 years experience in illumination industry. We have favorable quality control capacity and powerful potential productivity, and our products can conform to the requests of CCC, CE, GS, UL, RoHS etc. Many big companies cooperate with us by OEM or ODM types for we are very reliable to provide high quality but low price products. Be sure, we are the good partner to Trade Companies and wholesalers!

We are expecting your attention and welcome your cooperation.

Sale Dept./Shop:

25# Chaoyi Xingxin Avenue, Guzhen Town, Zhongshan City,
Guangdong 528421 China. (Near the Weiming hotel)

Tel: 0086 760 22383399 Fax: 0086 760 22369155

Mobile: 0086 18928132855

E-mail: sale@lightingchina.biz

MSN: aoyoulighting@hotmail.com

Yahoo Messenger: aoyoulighting@yahoo.com.cn

Skype: aoyoulighting

QQ: 935425986

<http://www.lightingchina.biz>

Factory:

21# Dongming Road, Guer Shuncheng Industrial Zone,
Guzhen Town, Zhongshan City, Guangdong 528421 China.

Tel: 0086 18928132855 Fax: 0086 760 22397987

E-mail: aoyoulighting@126.com

<http://www.aoyoulighting.com>